

Datasheet

[Get a Quote](#)

Overview

S5720-28P-PWR-LI-AC is the Huawei 24 Ethernet 10/100/1000 ports, 4 Gig SFP, PoE+, 370W POE AC power support, overseas.


Quick Specification

Model	S5720-28P-PWR-LI-AC
Part Number	98010769
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	5.2 kg (11.45 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.)</p>



Product Details:

Appearance:

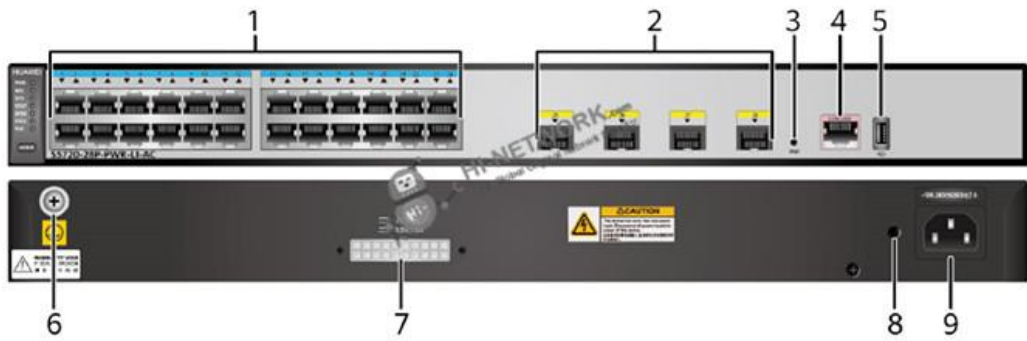

①	Twenty-four PoE+ 10/100/1000BASE-T ports
②	Four 1000BASE-X ports
③	One PNP button
④	One console port
⑤	One USB port
⑥	Ground screw
⑦	RPS socket
⑧	Jack for AC power cable locking strap
⑨	AC socket

Get more information:

Do you have any question about the S5720-28P-PWR-LI-AC 98010769?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010769
Model	S5720-28P-PWR-LI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	41 years





Datasheet

Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.)</p>
Weight (with packaging)	5.2 kg (11.45 lb)
Stack ports	Twenty-four 10/100/1000BASE-T ports and four 1000BASE-X ports
RTC	Not supported
RPS	Supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	<p>Not providing the PoE function: 42.7 W</p> <p>100% PoE loads: 448.5 W (system power consumption: 78.9 W, PoE: 369.6 W)</p>
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> Tested according to ATIS standard EEE enabled No PoE power consumption 	29.5 W
Operating temperature	0°C to 50°C (32°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 49.1 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification



S5720-28P-PWR-LI-AC (98010769)



Datasheet

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223