



Get a Quote

Overview

S5720-28TP-PWR-LI-ACL - Huawei S5700 Series Switches.S5720-28TP-PWR-LI-ACL(8 Ethernet 10/100/1000 PoE+,16 Ethernet 10/100/1000,2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP,124W POE AC,front access)

Quick Specification


Model	S5720-28TP-PWR-LI-ACL
Part Number	98010634
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	4.5 kg (9.92 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>



Datasheet

Product Details:

Appearance:

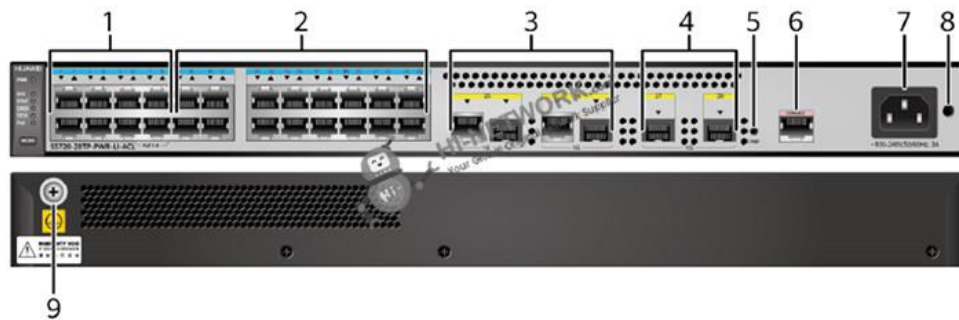

①	Eight PoE+ 10/100/1000BASE-T ports
②	Sixteen 10/100/1000BASE-T ports
③	Two combo ports (10/100/1000BASE-T + 100/1000BASE-X)
④	Two 1000BASE-X ports
⑤	One PNP button
⑥	One console port
⑦	AC socket
⑧	Jack for AC power cable locking strap
⑨	Ground screw

Get more information:

Do you have any question about the S5720-28TP-PWR-LI-ACL 98010634?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010634
Model	S5720-28TP-PWR-LI-ACL
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	42 years
Mean time to repair (MTTR)	2



Datasheet

Availability	> 0.99999
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>
Weight (with packaging)	4.5 kg (9.92 lb)
Stack ports	Twenty-four 10/100/1000BASE-T ports and two 1000BASE-X ports
RTC	Not supported
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	<p>Not providing the PoE function: 24.4 W</p> <p>100% PoE loads: 165.6 W (system power consumption: 42.4 W, PoE: 123.2 W)</p>
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> Tested according to ATIS standard EEE enabled No PoE power consumption 	19.4 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification



S5720-28TP-PWR-LI-ACL (98010634)



HI-NETWORK.com
Your Global Original Network Supplier

Datasheet

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

