

[Get a Quote](#)

Overview

AIR-AP2802I-A-K9 is one of the Cisco Aironet 2800 Series Access Points. This 2800 series, delivering new 802.11ac Wave 2 standard, is ideal for large enterprise organizations that rely on Wi-Fi to engage with customers. The Series is a hands-off product that's intelligent enough to make decisions based on end-device activities and usage. AIR-AP2802I-A-K9 provides internal antenna and A regulatory domain.

Quick Specification

Table 1 shows the quick specs of AIR-AP2802I-A-K9.

Part Number	AIR-AP2802I-A-K9
Frequency band and 20-MHz operating channels	A (A regulatory domain): <ul style="list-style-type: none">- 2.412 to 2.462 GHz; 11 channels- 5.180 to 5.320 GHz; 8 channels- 5.500 to 5.700 GHz; 8 channels (excludes 5.600 to 5.640 GHz)- 5.745 to 5.825 GHz; 5 channels
Antenna	Internal Antenna
Features	<ul style="list-style-type: none">- 4x4 MU-MIMO with three spatial streams- MRC- 802.11ac Beamforming- 20-, 40-, 80, 160-MHz channels- PHY data rates up to 5.2 Gbps- Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)- 802.11 DFS- CSD support
Interfaces	<ul style="list-style-type: none">- 2 x 100/1000BASE-T autosensing (RJ-45)- Management console port (RJ-45)- USB 2.0 (enabled via future software)
Dimensions (W x L x H)	8.66 x 8.68 x 2.17 in.
Weight	3.53 lb (1.6 kg)

Figure 1 shows the appearance of the AIR-AP2802I-A-K9.



Product Details


Figure 2 shows the face of AIR-AP2802I Model.



Note:

(1) LED indicator position

Figure 3 shows Ports and Connectors on the Head of the 2802I Model.

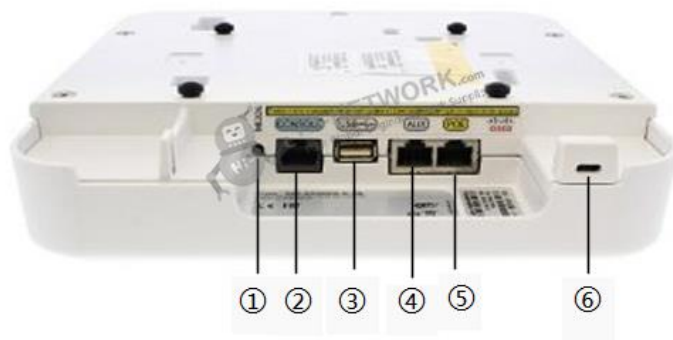

Note

(1)	Mode button	(4)	Gigabit Ethernet port
(2)	Console port	(5)	Gigabit Ethernet port
(3)	USB port	(6)	Kensington lock slot

Compare to Similar Items

Table 2 shows the comparison between two AP.

Part Number	AIR-AP2802I-A-K9	AIR-AP2802I-B-K9
Features	<ul style="list-style-type: none"> - 4x4 MU-MIMO with three spatial streams - MRC - 802.11ac Beamforming - 20-, 40-, 80, 160-MHz channels - PHY data rates up to 5.2 Gbps - Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx) - 802.11 DFS - CSD support 	<ul style="list-style-type: none"> - 4x4 MU-MIMO with three spatial streams - MRC - 802.11ac Beamforming - 20-, 40-, 80, 160-MHz channels - PHY data rates up to 5.2 Gbps - Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx) - 802.11 DFS - CSD support
Antenna	Internal Antenna	Internal Antenna
Regulatory Domain	A (A regulatory domain): <ul style="list-style-type: none"> - 2.412 to 2.462 GHz; 11 channels - 5.180 to 5.320 GHz; 8 channels - 5.500 to 5.700 GHz; 8 channels (excludes 5.600 to 5.640 GHz) - 5.745 to 5.825 GHz; 5 channels 	B (B regulatory domain): <ul style="list-style-type: none"> - 2.412 to 2.462 GHz; 11 channels - 5.180 to 5.320 GHz; 8 channels - 5.500 to 5.720 GHz; 12 channels - 5.745 to 5.825 GHz; 5 channels

Get More Information

Do you have any question about the AIR-AP2802I-A-K9?

Contact us now via info@hi-network.com.

Specification

AIR-AP2802I-A-K9 Specification	
Software	Cisco Unified Wireless Network Software Release 8.2.111.0 or later Cisco IOS XE Software Release 16.3
Supported wireless LAN controllers	Cisco 2500 Series Wireless Controllers, Cisco Wireless Controller Module for ISR G2, Cisco Wireless Services Module 2 (WiSM2) for Catalyst 6500 Series Switches, Cisco 5500 Series Wireless Controllers, Cisco Flex 7500 Series Wireless Controllers, Cisco 8500 Series Wireless Controllers, Cisco Virtual Wireless Controller Cisco Catalyst 3850 Series Switches, Cisco Catalyst 3650 Series Switches

AIR-AP2802I-A-K9 Datasheet



HI-NETWORK.com
Your Global Original Network Supplier

	Cisco Mobility Express
802.11n version 2.0 (and related) capabilities	<p>4x4 MIMO with three spatial streams</p> <p>Maximal ratio combining (MRC)</p> <p>802.11n and 802.11a/g beamforming</p> <p>20- and 40-MHz channels</p> <p>PHY data rates up to 450 Mbps (40 MHz with 5 GHz)</p> <p>Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)</p> <p>802.11 dynamic frequency selection (DFS)</p> <p>Cyclic shift diversity (CSD) support</p>
802.11ac Wave 1 capabilities	<p>4x4 MIMO with three spatial streams</p> <p>MRC</p> <p>802.11ac beamforming</p> <p>20-, 40-, and 80-MHz channels</p> <p>PHY data rates up to 1.3 Gbps (80 MHz in 5 GHz)</p> <p>Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)</p> <p>802.11 DFS CSD support</p>
802.11ac Wave 2 capabilities	<p>4x4 MU-MIMO with three spatial streams</p> <p>MRC</p> <p>802.11ac beamforming</p> <p>20-, 40-, 80, 160-MHz channels</p> <p>PHY data rates up to 5.2 Gbps</p> <p>Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)</p> <p>802.11 DFS CSD support</p>
Integrated antenna	<p>Flexible radio (either 2.4 GHz or 5 GHz)</p> <p>2.4 GHz, gain 4 dBi, internal antenna, omnidirectional in azimuth</p> <p>5 GHz, gain 6 dBi, internal directional antenna, elevation plane beamwidth 90° Dedicated 5-GHz radio</p> <p>5 GHz, gain 5 dBi, internal antenna, omnidirectional in azimuth</p>
External antenna(sold separately)s	<p>2802e Series access points are certified for use with antenna gains up to 6 dBi (2.4 GHz and 5 GHz)</p> <p>Cisco offers the industry's broadest selection of antennas, delivering optimal coverage for a variety of deployment scenarios</p>
Smart antenna connector	<p>Available on the 2802e Series access points only</p> <p>Requires the AIR-CAB002-DART-R= 2 ft smart antenna connector to RP-TNC connectors to connect a second antenna to the access point Required when running the flexible radio as either a second 5-GHz serving radio or Wireless Security Monitoring radio</p>
Interfaces	<p>s2x100/1000BASE-T autosensing (RJ-45)</p> <p>Management console port (RJ-45)</p> <p>USB 2.0 (enabled via future software)</p>
Indicators	Status LED indicates boot loader status, association status, operating status, boot loader warnings, boot loader errors
Dimensions (W x L x H)	Access point (without mounting brackets): 2802I: 8.66" x 8.68" x 2.17", 2802E: 8.66" x 8.77" x 2.50"
Weight	<p>Cisco Aironet 2802i</p> <p>3.53 lb (1.6 kg)</p> <p>Cisco Aironet 2802e</p> <p>4.6 lb (2.09 kg)</p>
Environmental	<p>Cisco Aironet 2802i</p> <p>Nonoperating (storage) temperature: -22° to 158°F (-30° to 70°C)</p>



	Nonoperating (storage) altitude test: 25°C, 15,000 ft. Operating temperature: 32° to 104°F (0° to 40°C) Operating humidity: 10% to 90% (noncondensing) Operating altitude test: 40°C, 9843 ft. Cisco Aironet 2802e Nonoperating (storage) temperature: -22° to 158°F (-30° to 70°C) Nonoperating (storage) altitude test: 25°C, 15,000 ft. Operating temperature: -4° to 122°F (-20° to 50°C) Operating humidity: 10% to 90% (noncondensing) Operating altitude test: 40°C, 9843 ft.
System memory	1 GB DRAM 256 MB flash
Input power requirements	802.3at PoE+, Cisco Universal PoE (Cisco UPOE®) 802.3at power injector (AIR-PWRINJ6=)
Power draw	26W at the PSE with all features enabled except for the USB 2.0 port 30W at the PSE with the USB 2.0 port enabled
Warranty	Limited lifetime hardware warranty

Want to Buy

[Get a Quote](#)[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223