

Overview


The Cisco C1300-8P-E-2G is a versatile and powerful switch designed to meet the demands of modern network environments. With 8x 10/100/1000 PoE+ ports that have a 60W power budget and 2x Gigabit copper/SFP combo ports, this switch ensures robust performance and flexibility for a variety of applications. Ideal for small to medium-sized businesses, this switch provides reliable connectivity and efficient power management.

Quick Specification

Table 1 shows the quick specification.

Model	C1300-8P-E-2G
Dimension	268 x 185 x 44 mm (10.56 x 7.28 x 1.73 in)
Weight	1.72 kg (3.79 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Ports	8x 10/100/1000 PoE+ ports with 60W power budget
Combo Ports	2x Gigabit copper/SFP combo ports
Form Factor	Fixed Configuration

Figure 1 shows the appearance of C1300-8P-E-2G.

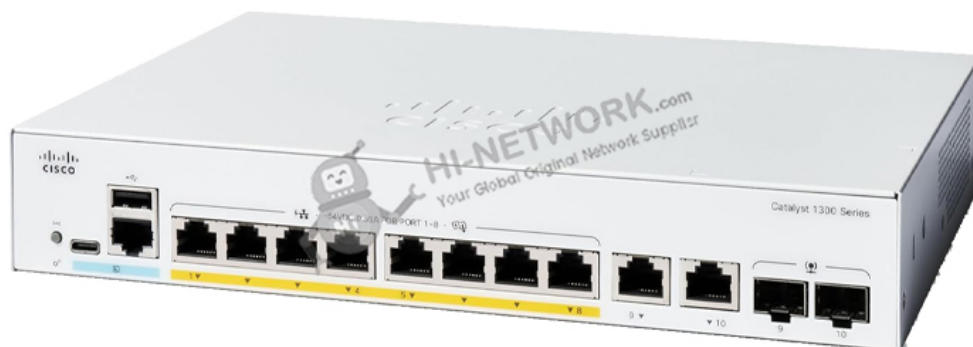



Product Details

Product Features

- 8 PoE+ ports with 60W power budget.
- 2 Gigabit copper/SFP combo ports for uplink flexibility.
- Advanced security features for network protection.
- Compact design suitable for small to medium-sized businesses.
- Easy integration with existing Cisco networks and equipment.

Product Applications

- Small offices requiring efficient power management and high-speed network connections.
- Retail environments needing reliable IP camera and POS system connectivity.
- Educational institutions for connecting computer labs and administrative offices.

Supported Options

Accessory	Model
PoE Injector	Cisco PWR-INJ4
SFP Module	Cisco GLC-LH-SM
Rack Mount Kit	Cisco RCKMNT-19-CMPCT

Compare to Similar Items

Model	Differences
Cisco C1200-24P-4X	24 PoE+ ports and 4x 10G SFP+ uplink ports
Cisco SG300-10MP	10x 10/100/1000 PoE+ ports, 62W power budget
Cisco 2960X-24PD-L	24x Gigabit Ethernet ports, 2x 10G SFP+ uplink ports

Get More Information

Do you have any questions about the C1300-8P-E-2G?

Contact us now via info@hi-network.com.





Specification

C1300-8P-E-2G Datasheet	
Ports	8x 10/100/1000 PoE+ ports with 60W power budget
Combo Ports	2x Gigabit copper/SFP combo ports
Mounting	Rack-mountable
Forwarding Rate	14.88 Mpps
Switching Capacity	20.0 Gbps
Power	100-240V 50-60 Hz, external
PoE	Supported
Dimension	268 x 185 x 44 mm (10.56 x 7.28 x 1.73 in)
Weight	1.72 kg (3.79 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Console port	Cisco standard RJ-45 console port and USB Type C port
USB port	USB Type C port on the front panel of the switch for easy file and image management as well as console port
Buttons	Reset button
Cabling type	Unshielded Twisted Pair (UTP) Category 5e or better for 1000BASE-T
LEDs	System, Link/Act, PoE, Speed
Flash	512 MB
CPU	ARM dual-core at 1.4 GHz
DRAM	1 GB DDR4
Certifications	UL (UL 62368), CSA (CSA 22.2), CE mark, FCC Part 15 (CFR 47) Class A

Want to Buy

Get a Quote

[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

