

Get a Quote

Overview


The Cisco® 40GBASE QSFP (Quad Small Form-Factor Pluggable) portfolio offers customers a wide variety of high-density and low-power 40 Gigabit Ethernet connectivity options for data center, high-performance computing 00networks, enterprise core and distribution layers, and service provider applications.

Quick Specification

Huawei Compatible	QSFP-40G-CSR4
Description	Cisco 40GBASE-CSR4 QSFP Module for MMF
Dimensions	13.5 x 18.4 x 72.4 mm
Wavelength (nm)	850
Cable Type	MMF
Core Size (microns)	50.0 50.0 50.0
Modal Bandwidth (MHz-km)	500 (OM2) 2000 (OM3) 4700 (OM4)
Cable Distance	82m 300m 400m
Power Consumption (W)	1.5
Pull Tab Color	Orange

Product Details:

The Front Panel:

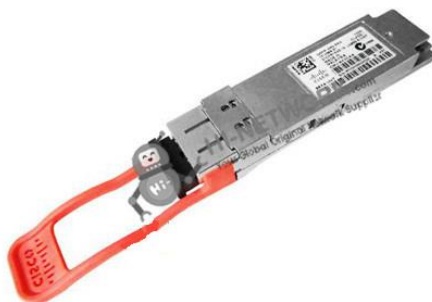

Features and benefits of Cisco QSFP 40G modules:

- Hot-swappable input/output device that plugs into a 40 Gigabit Ethernet Cisco QSFP port
- Interoperable with other IEEE-compliant 40GBASE interfaces where applicable
- Certified and tested on Cisco QSFP 40G ports for superior performance, quality, and reliability
- High-speed electrical interface compliant to the IEEE 802.3ba standard
- QSFP Form factor, 2-wire I2C communication interface and other low-speed electrical interface compliant to SFF 8436 and QSFP Multisource Agreement (MSA)

Compare To Similar Items:

Product Code	QSFP-40G-CSR4	QSFP-40G-CSR-S=
Description	Cisco 40GBASE-CSR4 QSFP Module for MMF	Cisco 40GBASE-CSR QSFP Module for Duplex MMF
Dimensions	13.5 x 18.4 x 72.4 mm	13.5 x 18.4 x 72.4 mm
Wavelength (nm)	850	850
Cable Type	MMF	MMF
Core Size (microns)	50.0 50.0 50.0	50.0
Modal Bandwidth (MHz-km)	500 (OM2) 2000 (OM3) 4700 (OM4)	2000 (OM3) 4700 (OM4)
Cable Distance	82m 300m 400m	300m 400m
Power Consumption (W)	1.5	3.5
Pull Tab Color	Orange	Orange

Get more information:

Do you have any question about the QSFP-40G-CSR4?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Huawei Compatible	QSFP-40G-CSR4
Description	Cisco 40GBASE-CSR4 QSFP Module for MMF
Dimensions	13.5 x 18.4 x 72.4 mm
QSFP Port cabling specifications	
Wavelength (nm)	850
Cable Type	MMF
Core Size (microns)	50.0 50.0 50.0
Modal Bandwidth (MHz-km)	500 (OM2) 2000 (OM3) 4700 (OM4)
Cable Distance	82m 300m 400m
Power Consumption (W)	1.5
Pull Tab Color	Orange
Optical characteristics	
Type	40GBASE-CSR4, 4 lanes, 850 nm MMF
Transmit Power (dBm)	Max:0.0 per lane Min:-7.3 per lane
Receive Power (dBm)	Max:0.0 per lane Min:-9.9 per lane
Transmit and Receive Wavelength (nm)	840 to 860
Environmental conditions	
Commercial temperature	0 to 70°C (32 to 158°F)
Storage temperature	-40 to 85°C (-40 to 185°F)
Regulatory and standards compliance	
Standards	<ul style="list-style-type: none"> •GR-20-CORE: Generic Requirements for Optical Fiber and Optical Fiber Cable •GR-326-CORE: Generic Requirements for Single-Mode Optical Connectors and Jumper Assemblies •GR-1435-CORE: Generic Requirements for Multifiber Optical Connectors •IEEE 802.3ba (-SR4, -LR4) •IEEE 802.3ae (-CSR4) •QSFP+ MSA SFF-8436



	<ul style="list-style-type: none">•SFP+ MSA SFF-8431 and -8461•RoHS 6
Safety	<ul style="list-style-type: none">•Cable jacket of QSFP copper modules is UL E116441 Compliant•QSFP copper cables are ELY Compliant

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

