

Overview


AN6000-15 are the next generation OLT platform which have ultra broadband capability for PON smooth evolution. Their distributed architecture design can support high density GPON, XG(S)-PON, XG(S)-PON Combo, TWDM-PON, WDM-PON and P2P card, will bring higher bandwidth and enhance capacity for access network. Cloudization and virtualization can also be implemented on them. All of these will improve user experience, reduce long-term investment and maintenance costs of operators.

Quick Specification

Model	AN6000-15
Dimensions of the subrack H/W/D	486mm x 480 mm x 282 mm
User-side Interface	GPON/XG(S)-PON/XG(S) Combo/TWDM-PON/WDM-PON/P2P
Power Supply	DC -48V
Service Slots	15

Product Details:

The Front Panel:

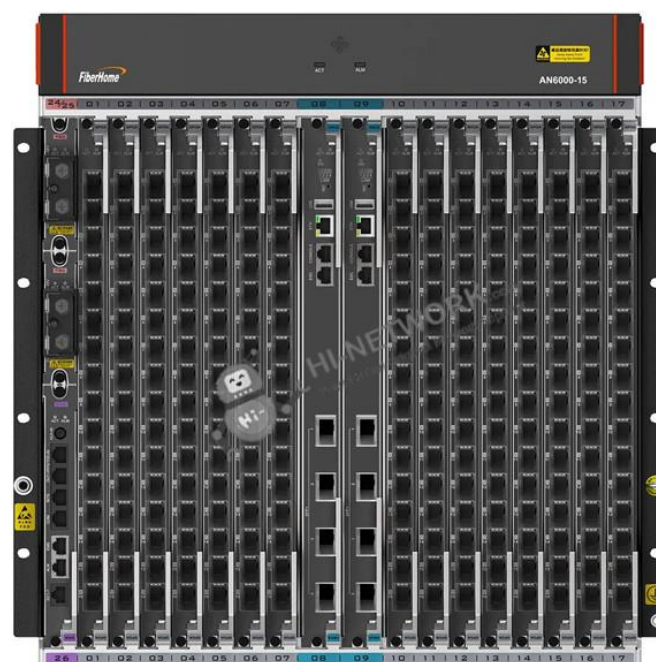

Accessories For AN6000-15:

Supported Cards:

Type	Slot	Card Supported
Service card slot	1-7 and 10- 17	GPOA, EX8A, EXOA, GX8A, GM8A, GM8B, GMOA, GNOA, GFOA and PXNA
Uplink card slot	16- 17	HU8A, KU1B
Core switch card slot	8-9	HSCA
Fan unit slot	23	FAN
Power card slot	24-25	PIBA
Common interface card slo	26	CIOA

Compare To Similar Items:

Model	AN6000-17	AN6000-15
Dimensions of the subrack H/W/D	486mm x 530 mm x 284 mm	486 mm x 480 mm x 282 mm
Weight of empty subrack (Including the FAN)	19 kg	16.65 kg
User-side Interface	GPON/XG(S)-PON/XG(S) Combo/TWDM-PON/WDM-PON/P2P	
Power Supply	DC -48V	
Service Slots	17	15

Get more information:

Do you have any question about the AN6000-15?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Model	AN6000-15
Dimensions of the subrack H/W/D	486mm x 480 mm x 282 mm
User-side Interface	GPON/XG(S)-PON/XG(S) Combo/TWDM-PON/WDM-PON/P2P
Power Supply	DC -48V
Service Slots	15



Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

